

G-PROFI ENGINE OIL

G-Profi MSJ 15W-40



Вискозитетна стабилност



До Евро-5 включително



Полусинтетично масло



Система за рециркулация на отработените газове



Съвместимо с филтри за твърди частици



Двигател с турбокомпресор



До Евро-6 включително



Система за неутрализация на отработените газове



Среднопепелно масло

Description

Advantages

Application





Physico-chemical characteristics

Indicator	Method	G-Profi MSJ 15W-40
Kinematic Viscosity at 100 °C, mm ² /s at 40 °C, mm ² /s	ASTM D 445 ASTM D 445	14.9 110.5
Viscosity Index	ASTM D 2270	140
Flash Point (COC), °C	ASTM D 92	235
Pour Point, °C	ASTM D 97	-35
Density at 15 °C, kg/m ³	ASTM D 4052	875
Total Base Number, mg KOH/g	ASTM D 2896	8.5
Sulfated Ash, wt%	ASTM D 874	1.0

Specifications

- SAE 15W-40
- API SN/CJ-4
- Caterpillar ECF-1a
- Caterpillar ECF-2
- Caterpillar ECF-3
- Deutz DQC III LA
- Detroit Diesel DDC 93K218
- MB 228.31
- MTU Cat. 2.1
- MAN M 3575
- Mack EO-O PP
- Volvo VDS-4
- Cummins CES 20081

-
-
-

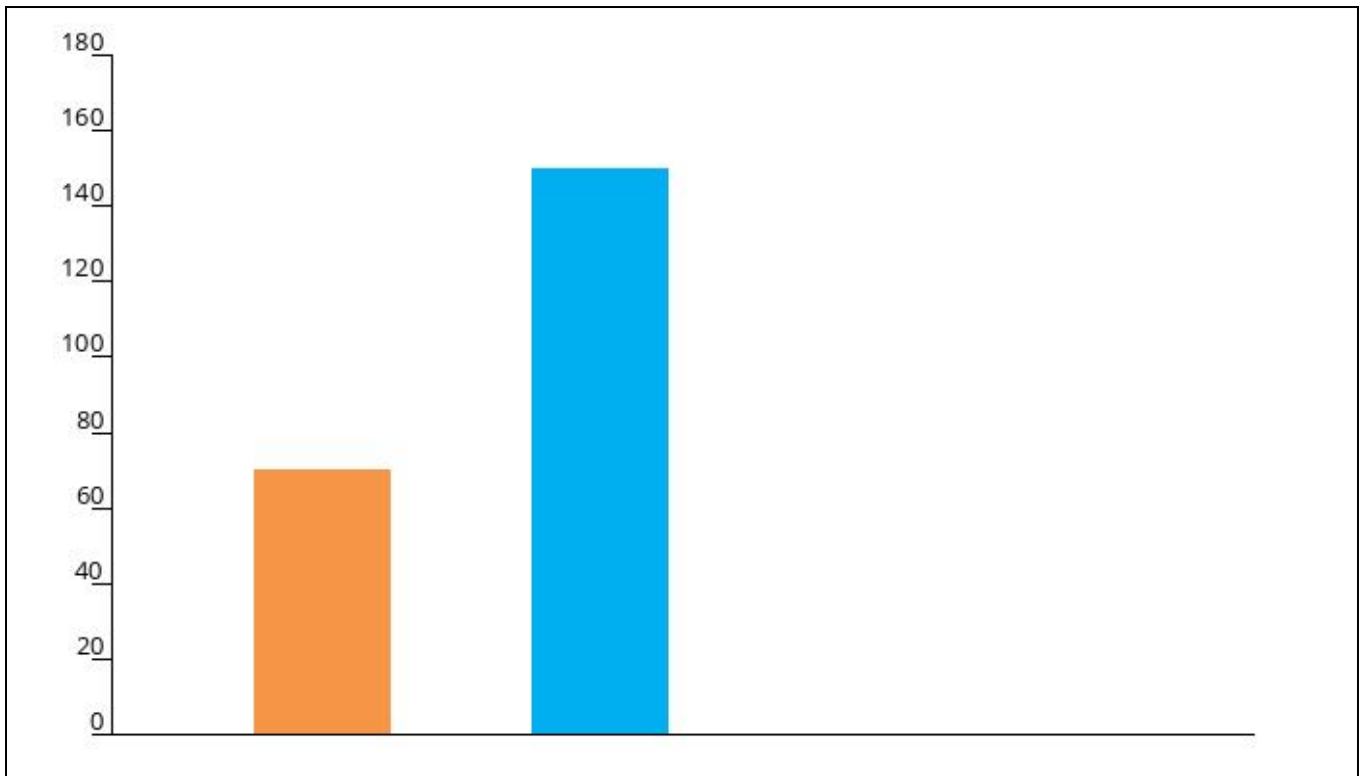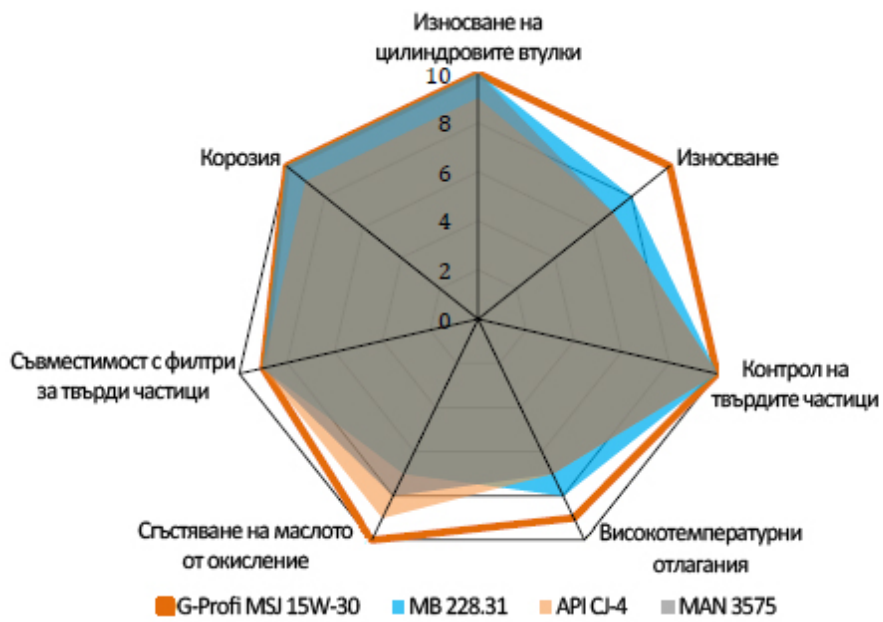

The company's management system is certified in accordance with international standards

ISO 9001



ISO 14001



ISO/TS 16949



OHSAS 18001



Gazpromneft — Lubricants Ltd.
117218, Moscow, 14/3 Krzhizhanovski
Str., Block A
Tel: +7 (495) 642-99-69
Fax: +7 (495) 921-48-63

The above data are typical for the current production. Due to continuous research and development, the information provided in the document may be changed.
Information on the safe use of the product is contained in the Safety Data Sheet. You can get more detailed information from the technical specialists of the company.
E-mail: service@maslagaz.com 01/2018